


HeatSeal™ ProSeries 4000LM

With a 494 mm (A2) throat width of the IL19VT is ideal for '2-up' A3 brochure/report cover work or A2 Posters and Pop-Up's.

The ability to laminate signs, display materials and posters up to A2 brings pouch lamination even closer to the Graphics profession opening up an entire new sphere of application opportunities.

- Lamination width* from ID size to A2 Max (470 mm), up to 2 x 250 Mic. (500 Total)
- Hot Roller heating Technology:
- 2 x Hot Rollers plus Plate plus 2 x Pressure Rollers
- Max. Laminating Thickness – 3.5 mm
- Warm Up time – 2 minutes
- Robust and heavy duty metal construction

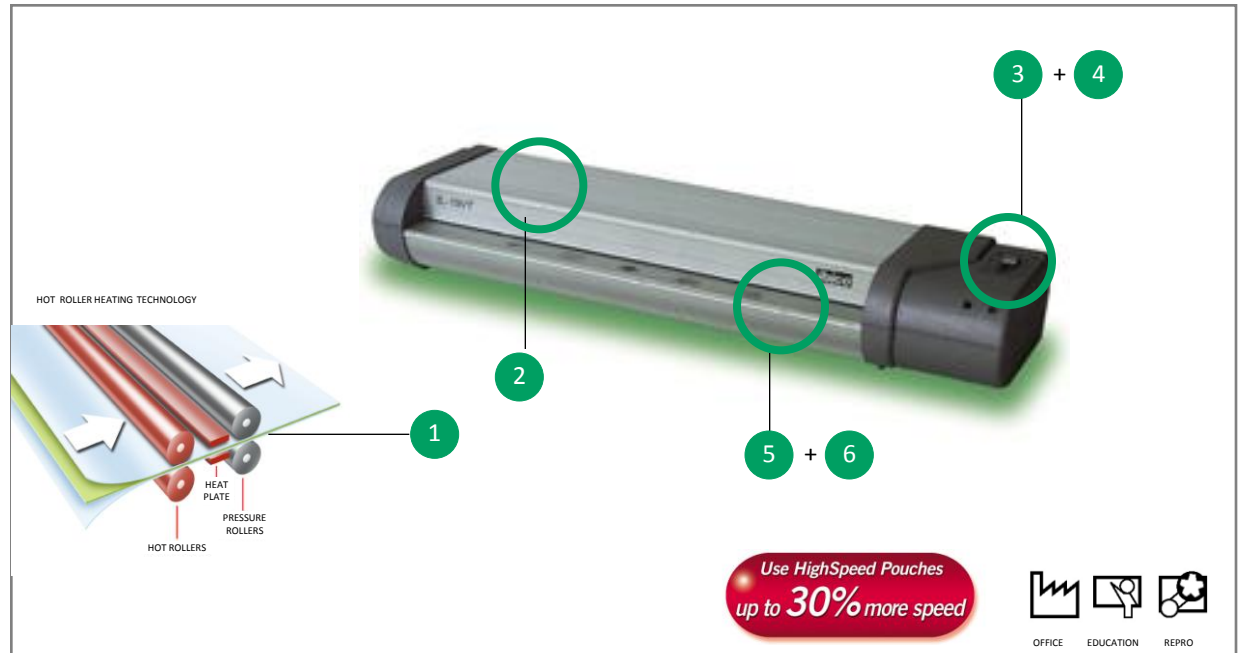

Features & Benefits

1. Four Roller Design: for a better result
2. Heavy duty metal construction
3. Speed control
4. Fixed temperature
5. 494mm Throat width
6. Laminates up to A2 documents

Technical Specifications

| | | | |
|-----------------------|--------------------------|---------------------------------|-------------|
| Photo quality | ✓ | Reverse | |
| Heat-up Time (75 mic) | 2 min | Display | ✗ |
| Speed mm/min. | 470 | Pouch counter | ✗ |
| Temperature control | Variable (display) | Auto switch off | ✗ |
| Cold Lamination | ✓ | A4 Laminates /hr* | 93 |
| Speed control | Fixed | HighSpeed Pouch Laminates/Hr* | 131 |
| Rollers | 4+ Heated Plates | Warranty | 2 years |
| Max. Document size | A2 | Dimensions (mm) | 675x190x105 |
| Max pouch thickness | 2x250 micron (500 total) | Certification | CE |
| Ready Lamp | ✓ | Weight | 6.9kg |
| Release Function | ✗ | Power Consumption, Watts / Amps | 1300W/6.0A |

Product Codes:

EU IB509551
UK IB509629
CH IB509568



HeatSeal™ ProSeries 4500LM

With many of the same features and benefits of the 3500, the 470mm throat width of the 4500LM is ideal for '2-up' A3 brochure/report cover work or A2 Posters and Pop-Up's.

The ability to laminate signs, display materials and posters up to A2 brings pouch lamination even closer to the Graphics profession opening up an entire new sphere of application opportunities.

- Lamination width* from ID size to A2 Max (470 mm), up to 2 x 300 Mic. (600 Total)
- Hot Roller heating Technology:
- 2 x Hot Rollers plus Plate plus 2 x Pressure Rollers
- Max. Laminating Thickness – 3.5 mm
- Warm Up time – 4 to 8 minutes depending upon setting
- Robust and heavy duty metal construction



Features & Benefits

1. Digital Display with 6 speed settings
Give Users pre-set modes for popular applications as well as finger-tip control over speed and temperature settings for accurate media-pouch compatibility
2. Hot Roller Heating Technology: for a better result
3. Heavy duty metal construction
4. Speed control: variable Speed max 1500 mm/min to min 190 mm/min
5. Temperature: 5 pre-set settings 0°, 80°, 110°, 130°, 150° to adjust temperature for each application
6. Reverse Mode: Anti-jam function to solve any miss-feeding problems
7. 470mm Throat width Gives full A2 Lamination possibilities
8. Preheat function

Technical Specifications

| | | | |
|-----------------------|----------------------------|---------------------------------|---------------|
| Photo quality | ✓ | Reverse | ✓ |
| Heat-up Time (75 mic) | 4-8 min | Display | ✓ |
| Speed mm/min. | 190-1500 | Pouch counter | ✗ |
| Temperature control | Variable (display) | Auto switch off | ✗ |
| Cold Lamination | ✓ | A4 Laminates /hr* | 297 |
| Speed control | Variable /6 std Settings | HighSpeed Pouch Laminates/Hr* | 417 |
| Rollers | 4+ Heated Plates | Warranty | 2 years |
| Max. Document size | A2 | Dimensions (mm) | 673x318x178 |
| Max pouch thickness | 2 x 300 micron (600 total) | Certification | GS / TÜV / CE |
| Ready Lamp | ✗ | Weight | 22kg |
| Release Function | ✗ | Power Consumption, Watts / Amps | 1500W/6.8A |

Product Codes:

EU 1700520

UK 1700530

